



WR135G

**AC1200**  
**Dual Band Gigabit**  
**WiFi Router**

---





**WR135G Homenet Router** is a strong wireless dual-band gigabit router specially designed for small businesses and apartments with over 100Mbps FTTH network.

It adopts the MTK mainstream chip solution. It has a larger data cache space to guarantee game acceleration and more functions. The built-in independent PA / LNA signal enhancement module and external 4 high-gain omnidirectional antennas produce strong signal penetration performance, which truly helps to achieve the full coverage of dual-band Wi-Fi in small business and small-sized apartments.

WR135G provides a maximum wireless access rate of 1200Mbps, 1 Gigabit WAN port, and 4 Gigabit LAN ports.

# Main Features



**Dual-band WiFi**



**IPV6**



**TR069**



**Gigabit Ports**



**Access Control**



**Multicast**



**MU-MIMO**



**OTA**



**VPN**



**Guest Wi-Fi**


# Indicator



Power

2.4G Wi-Fi

5G Wi-Fi

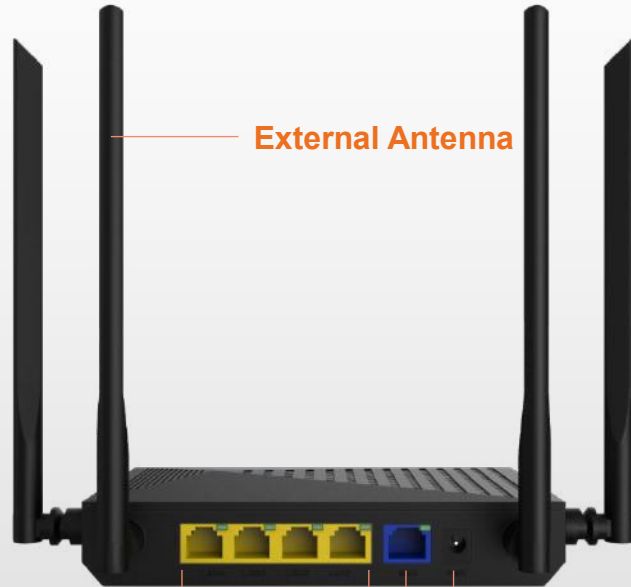

External Antenna

4xLAN Interface

1xWAN Interface

Power Input



Reset button

# Application scenario



With innovative MU-MIMO (11AC Wave 2.0), WR135G can communicate with multiple devices at a time, shortening latency and improving quantities of connected devices.



# Hardware Features



|                        |  |
|------------------------|--|
| <b>Name</b>            | AC1200 Wireless Router   |
| <b>Model</b>           | WR135G   |
| <b>CPU</b>             | MTK CPU MT7621D  |
| <b>Memory /Storage</b> | 128MB/8MB  |
| <b>Wi-Fi Antennas</b>  | 2×2.4GHz<br>2×5GHz<br>External 5dBi Gain   |
| <b>Protocol</b>        | IEEE 802.11a/b/g/n/ac  |
| <b>Wi-Fi Speed</b>     | 2.4G Wi-Fi (Speed 300Mbps)<br>5G Wi-Fi (Speed 867Mbps)   |
| <b>LED</b>             | Power      Green: Power on<br>Off: Power off<br><br>2.4G Wi-Fi    Green:2.4G Wi-Fi up<br>Off:2.4G Wi-Fi down<br><br>5G Wi-Fi      Green:5G Wi-Fi up<br>Off:5G Wi-Fi down |

|                              |                  |                              |
|------------------------------|------------------|------------------------------|
| <b>Interface</b>             | WAN              | 1 RJ45 port ,10/100/1000Mbps |
|                              | LAN              | 4 RJ45 port ,10/100/1000Mbps |
|                              | Reset            | Button                       |
| <b>Transmit Power</b>        | 2.4G             | 20dBm                        |
|                              | 2.4G enhanced    | 23dBm                        |
|                              | 5G               | 20dBm                        |
| <b>Power Supply</b>          | DC12V/1A Adapter |                              |
| <b>Power Consumption</b>     | <6W              |                              |
| <b>Dimension</b>             | 160x110x30mm     |                              |
| <b>Operating Temperature</b> | -10 ~ 50°C       |                              |
| <b>Storage Temperature</b>   | -40 ~ 85°C       |                              |

# Software Features



|                       |   |                          |  |
|-----------------------|---|--------------------------|--|
| <b>IP Protocols</b>   | IPv4/IPv6   | <b>Guest Wi-Fi</b>       | 2.4G Guest SSID<br>5G Guest SSID       |
| <b>WAN Mode</b>       | Dynamic IP<br>Static IP<br>PPPoE  | <b>Parental Controls</b> | Limited Time DD/MM<br>Monday to Sunday |
| <b>Security</b>       | Firewall<br>Access Control<br>IP & MAC Binding<br>MAC/IP/URL/Port Filter<br>Application Layer Gateway<br>DDoS Attack Prevention | <b>Equipment Mode</b>    | Router<br>Bridge<br>Relay              |
| <b>System Service</b> | DDNS<br>Telnet Server<br>DMZ Host<br>UPnP<br>Remote WEB<br>OTA Upgrade<br>Diagnosis<br>NTP                                      | <b>Management</b>        | WEB<br>Telnet<br>TR069                 |
|                       |   | <b>System log</b>        | System log                             |
|                       |   | <b>Multicast</b>         | IPTV<br>IGMP                           |
|                       |   | <b>QoS</b>               | Speed limit                            |

# Ordering Information



| Product Model     | Product Description   |
|-------------------|---|
| <b>WR135G-M32</b> | 1*10/100/1000Base-Tx Ethernet WAN port, 4*10/100/1000Base-Tx Ethernet LAN ports, external 4*5dBi antennas, built-in 2.4G PA, support 2.4G/5G dual frequency, support 802.11 a/b/g/n/ac protocol, wireless transmission rate 1200Mbps, 12VDC power supply. |
| <b>WR135G-M30</b> | 1*10/100/1000Base-Tx Ethernet WAN port, 4*10/100/1000Base-Tx Ethernet LAN ports, external 4*5dBi antennas, support 2.4G/5G dual frequency, support 802.11a/b/g/n/ac protocol, wireless transmission rate 1200Mbps, 12VDC power supply.                    |

## Contact Us

---

Shenzhen C-Data Technology Co.,Ltd.  
Address: Floor 6, Building F, Songbai Road 1008,  
Sunshine Community, Xili Street, Nanshan District,  
Shenzhen(518108)

Tel: +86-755-26014509/4710/4711  
Fax:+86-755-26014506  
Email: [marketing@cdatatec.com](mailto:marketing@cdatatec.com)  
Website: [www.cdatatec.com](http://www.cdatatec.com)